


PVC cable
M8 and M12 connector


PVC cable
1/2" and 7/8" connector

PUR cable halogen free
M8, M12, 1/2" and 7/8" connector


Reinforced PVC cable, stainless steel ring
M8, M12, and 1/2" connector (IP69K)

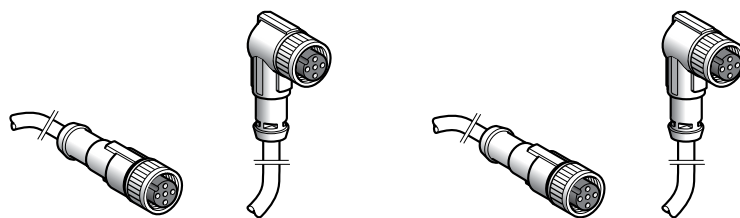

Connector Size		M8 Straight 3 pin	Elbowed 3 pin	Straight 4 pin	Elbowed 4 pin
References	PVC cable	XZCPV0566L●	XZCPV0666L●	XZCPV0941L●	XZCPV1041L●
	PUR cable	XZCP0566L●	XZCP0666L●	XZCP0941L●	XZCP1041L●
	PVC cable IP69K	XZCPA0566L●	-	XZCPA0941L●	-

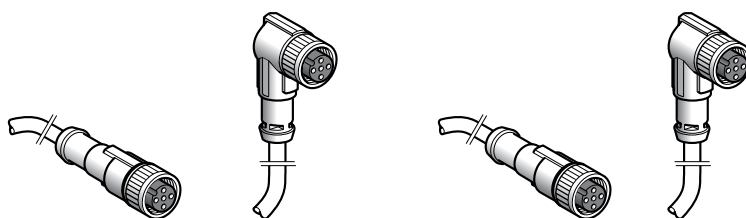


Connector Size		M12 Straight 4 pin	Elbowed 4 pin	Straight 5 pin	Elbowed 5 pin
References	PVC cable	XZCPV1141L●	XZCPV1241L●	XZCPV1164L●	XZCPV1264L●
	PUR cable	XZCP1141L●	XZCP1241L●	XZCP1164L●	XZCP1264L●
	PVC cable IP69K	XZCPA1141L●	XZCPA1241L●	XZCPA1164L●	-

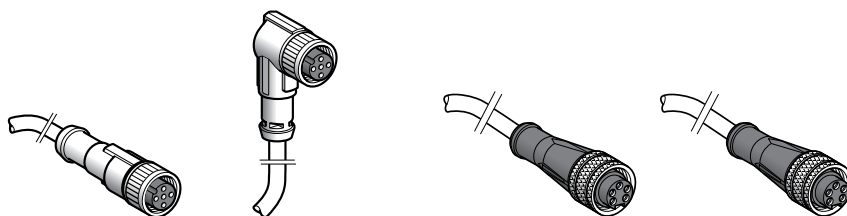

Connector Size		1/2" Straight 3 pin	Elbowed 3 pin	7/8" Straight 3 pin	Straight 5 pin
References	PVC cable	XZCPV1865L●	XZCPV1965L●	XZCPV1670L●	XZCPV1764L● (1)
	PUR cable	XZCP1865L●	XZCP1965L●	XZCP1670L●	XZCP1764L●
	PVC cable IP69K	XZCPA1865L●	XZCPA1965L●	-	-

(1) Cable Material is yellow PVC & STOOW

Complete each reference by adding the length of cable (i.e., 2 for 2 m, 5 for 5 m and 10 for 10 m).
Example: XZCPV1141L2 is pre-wired connector M12 connectors with 4 contacts and 2 m PVC cable.

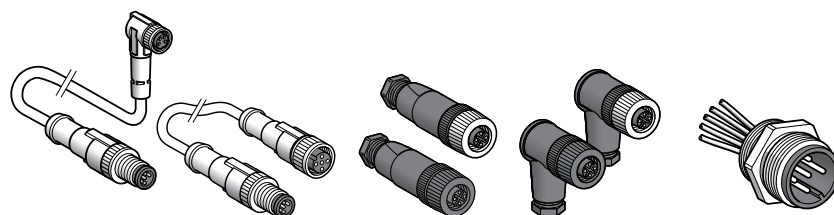

Other accessories (1)	Jumpers	Connector	Receptacle
References	XZCR...	XZCC...	XZCE...

(1) For more information on XZ jumpers, connectors, and receptacles, please see tesensors.com or our OsiSense XZ Cabling Accessories Catalog 9006CT1208

References	Cable Material	Connector				Cable Length	Output LEDs	TURCK	Belden (Lumberg)	Molex (Brad Harrison)	Rockwell Automation	Square D XSZ
		M/F	Type	Style	Pins							
XZCPV0566L10	PVC	Female	M8	Straight	3	10	N	PKG 3M-10	RKMV 3-06/10M	120086-0111	889P-F3AB-10	XSZCS103
XZCPV0566L2	PVC	Female	M8	Straight	3	2	N	PKG 3M-2	RKMV 3-06/2M	120086-0102	889P-F3AB-2	XSZCS101
XZCPV0566L5	PVC	Female	M8	Straight	3	5	N	PKG 3M-5	RKMV 3-06/5M	120086-0107	889P-F3AB-5	XSZCS102
XZCPV0666L10	PVC	Female	M8	Elbowed	3	10	N	PKW 3M-10	RKMV 3-06/10M	120086-0124	889P-R3AB-10	XSZCS113
XZCPV0666L2	PVC	Female	M8	Elbowed	3	2	N	PKW 3M-2	RKMV 3-06/2M	120086-0119	889P-R3AB-2	XSZCS111
XZCPV0666L5	PVC	Female	M8	Elbowed	3	5	N	PKW 3M-5	RKMV 3-06/5M	120086-0122	889P-R3AB-5	XSZCS112
XZCPV0766L10	PVC	Female	M8	Elbowed	3	10	Y	PKW 3M-P7X2-10	RKMV/LED A 3-06/10M	120086-0424	889P-P3AB-10	XSZCS123
XZCPV0766L2	PVC	Female	M8	Elbowed	3	2	Y	PKW 3M-P7X2-2	RKMV/LED A 3-06/2M	120086-0421	889P-P3AB-2	XSZCS121
XZCPV0766L5	PVC	Female	M8	Elbowed	3	5	Y	PKW 3M-P7X2-5	RKMV/LED A 3-06/5M	120086-0423	889P-P3AB-5	XSZCS122
XZCPV0941L10	PVC	Female	M8	Straight	4	10	N	PKG 4M-10	RKMV 4-07/10M	120086-0155	889P-F4AB-10	XSZCS143
XZCPV0941L2	PVC	Female	M8	Straight	4	2	N	PKG 4M-2	RKMV 4-07/2M	120086-0144	889P-F4AB-2	XSZCS141
XZCPV0941L5	PVC	Female	M8	Straight	4	5	N	PKG 4M-5	RKMV 4-07/5M	120086-0147	889P-F4AB-5	XSZCS142
XZCPV1041L10	PVC	Female	M8	Elbowed	4	10	N	PKW 4M-10	RKMV 4-07/10M	120086-0180	889P-R4AB-10	XSZCS153
XZCPV1041L2	PVC	Female	M8	Elbowed	4	2	N	PKW 4M-2	RKMV 4-07/2M	120086-0175	889P-R4AB-2	XSZCS151
XZCPV1041L5	PVC	Female	M8	Elbowed	4	5	N	PKW 4M-5	RKMV 4-07/5M	120086-0178	889P-R4AB-5	XSZCS152
XZCPV1141L10	PVC	Female	M12	Straight	4	10	N	RK 4.43T-10	RKT 4-633/10M	120065-0277	889D-F4AC-10	XSZCD103Y
XZCPV1141L2	PVC	Female	M12	Straight	4	2	N	RK 4.43T-2	RKT 4-633/2M	120065-0255	889D-F4AC-2	XSZCD101Y
XZCPV1141L5	PVC	Female	M12	Straight	4	5	N	RK 4.43T-5	RKT 4-633/5M	120065-0265	889D-F4AC-5	XSZCD102Y
XZCPV1164L10	PVC	Female	M12	Straight	5	10	N	RK 4.5T-10	RKT 5-612/10M	120065-0487	889D-F5AC-10	XSZCD1503Y
XZCPV1164L2	PVC	Female	M12	Straight	5	2	N	RK 4.5T-2	RKT 5-612/2M	120065-0471	889D-F5AC-2	XSZCD1501Y
XZCPV1164L5	PVC	Female	M12	Straight	5	5	N	RK 4.5T-5	RKT 5-612/5M	120065-0479	889D-F5AC-5	XSZCD1502Y
XZCPV1241L10	PVC	Female	M12	Elbowed	4	10	N	WK 4.43T-10	RKWT 4-633/10M	120065-1567	889D-R4AC-10	XSZCD113Y
XZCPV1241L2	PVC	Female	M12	Elbowed	4	2	N	WK 4.43T-2	RKWT 4-633/2M	120065-1551	889D-R4AC-2	XSZCD111Y
XZCPV1241L5	PVC	Female	M12	Elbowed	4	5	N	WK 4.43T-5	RKWT 4-633/5M	120065-1558	889D-R4AC-5	XSZCD112Y
XZCPV1264L10	PVC	Female	M12	Elbowed	5	10	N	WK 4.5T-10	RKWT 5-612/10M	120065-1706	889D-R5AC-10	XSZCD1513Y
XZCPV1264L2	PVC	Female	M12	Elbowed	5	2	N	WK 4.5T-2	RKWT 5-612/2M	120065-1697	889D-R5AC-2	XSZCD1511Y
XZCPV1264L5	PVC	Female	M12	Elbowed	5	5	N	WK 4.5T-5	RKWT 5-612/5M	120065-1701	889D-R5AC-5	XSZCD1512Y
XZCPV1340L10	PVC	Female	M12	Elbowed	3	10	Y	WK 4T-10-P7X2	RKWT/LED A 4-3-633/10M	120067-0235	889D-P4AC-10	XSZCD123Y
XZCPV1340L2	PVC	Female	M12	Elbowed	3	2	Y	WK 4T-2-P7X2	RKWT/LED A 4-3-633/2M	120067-0227	889D-P4AC-2	XSZCD121Y
XZCPV1340L5	PVC	Female	M12	Elbowed	3	5	Y	WK 4T-5-P7X2	RKWT/LED A 4-3-633/5M	120067-0231	889D-P4AC-5	XSZCD122Y
XZCPV1865L10	PVC	Female	1/2"	Straight	3	10	N	KB 3T-10	RKT 3 U-618/30 F	120072-0185	889R-F3AEA-10	XSZCK113Y
XZCPV1865L2	PVC	Female	1/2"	Straight	3	2	N	KB 3T-2	RKT 3 U-618/6 F	120072-0171	889R-F3AEA-2	XSZCK111Y
XZCPV1865L5	PVC	Female	1/2"	Straight	3	5	N	KB 3T-5	RKT 3 U-618/15 F	120072-0178	889R-F3AEA-5	XSZCK112Y
XZCPV1965L10	PVC	Female	1/2"	Elbowed	3	10	N	WKB 3T-10	RKWT 3 U-618/30 F		889R-R3AEA-10	XSZCK103Y
XZCPV1965L2	PVC	Female	1/2"	Elbowed	3	2	N	WKB 3T-2	RKWT 3 U-618/6 F	120072-0219	889R-R3AEA-2	XSZCK101Y
XZCPV1965L5	PVC	Female	1/2"	Elbowed	3	5	N	WKB 3T-5	RKWT 3 U-618/15 F		889R-R3AEA-5	XSZCK102Y
XZCPV1541L1	PVC	Male	M12	Straight	4	1	N	RS 4.43T-1	RST 4-633/1M		889D-M4AC-1	-
XZCPV1541L2	PVC	Male	M12	Straight	4	2	N	RS 4.43T-2	RST 4-633/2M	120072-0445	889D-M4AC-2	-
XZCPV1541L5	PVC	Male	M12	Straight	4	5	N	RS 4.43T-5	RST 4-633/5M	120072-0447	889D-M4AC-5	-
XZCPV1564L1	PVC	Male	M12	Straight	5	1	N	RS 4.5T-1	RST 4-612/1M		889D-M5AC-1	-
XZCPV1564L2	PVC	Male	M12	Straight	5	2	N	RS 4.5T-2	RST 4-612/2M	120072-0551	889D-M5AC-2	-
XZCPV1564L5	PVC	Male	M12	Straight	5	5	N	RS 4.5T-5	RST 4-612/5M	120072-0555	889D-M5AC-5	-



PVC range

Good resistance

- to moderate mechanical stress
- to chemical products
- to humid environments
- Easy cable stripping
- UL certified

PUR range

Good resistance

- to severe mechanical stress (friction, abrasion, torsion)
- to hot and cold oils, greases and lubricants
- Halogen free
- UL certified

PVC food & beverage range

Good resistance

- to high pressure cleaning (IP69K and smooth stainless-steel clamping ring)
- to disinfection using aggressive detergents

CONFIDENTIAL - FOR INTERNAL USE ONLY

Restricted to Schneider Electric personnel

Please Note: Product replacement may not be an exact one-for-one match. Please review the product literature and application.

Schneider Electric USA, Inc.

Telemecanique Sensors
1875 Founders Dr.
Dayton, OH 45420-4017
TEL: 888-778-2733

www.tesensors.us

Schneider Electric Canada, Inc.

Telemecanique Sensors
5985 McLaughlin Road
Mississauga, Ontario L5R 1B8
TEL: 800-565-6699

www.tesensors.ca

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

9006HO1204